

Justsalt® Pro

Pool
TECHNOLOGIE

Saltwater chlorinator + pH regulator
+ ORP controller

Benefits

- Intuitive navigation on backlit LCD display
- In line or dashboard display
- Soft touch keyboard with quick access keys
- Bluetooth remote control with e-Pool® app
- Low Salt / Normal Salt mode (depending on model)
- High quality pH and ORP probes, factory tested and calibrated
- Cell collar diam 50 mm (depending on model)
- Integrated silent dosing pump
- Compatible with new European regulation (N°2019/1148):
pH correcting agent adjustable concentration
- New clear accessories holder



Features


- **Smart Power:** current monitoring ensuring stable production
- **Smart and proportional pH regulation according to the pool volume** in acid (pH-) or base (pH+) mode
- **Chlorine production control by ORP probe**
- **Self cleaning cell by memory adjustable polarity inversion** according to water hardness
- **Operate at any salt level from 2,5g/l (NS) and 1,5g/l (LS)** without high limit
- **Superboost mode:** 125% superchlorination for up to 48 hours to overcome an increased need of disinfectant
- **Low mode to reduce chlorine production,** when cover closed or bubble cover installed
- **Automatic winterization and restart from 15C°**
- **Display of pool salt level, water temperature and cell lifespan**
- **Multilingual communication interface**
- **Multilingual alarm message:** written message display of malfunction cause
- **Safeties:** high and low ORP value, unreached set point, pH set point overrun and overfeeding
- **Log of events**
- **Self-diagnosis programme for easy maintenance**

Model	Pool volume* m ³	Chlorine Production g/h	Reference
Justsalt Pro NPS 8	40	8	ELPO20NPSA-G4NM08
Justsalt Pro NPS 12	60	12	ELPO20NPSA-G4NM12
Justsalt Pro NPS 16	NS 80 / LS 60	NS 16 / LS 12	ELPO20NPSA-G4HX16
Justsalt Pro NPS 23	NS 120 / LS 80	NS 23 / LS 16	ELPO20NPSA-G4HX23
Justsalt Pro NPS 30	NS 160 / LS 120	NS 30 / LS 23	ELPO20NPSA-G4HX30

* In hot climates, reduce volume by 20% - NS : Normal Salt (5g/l) / LS : Low Salt (1,5g/l)

Technical specifications	
Display	LCD 2 lines
ORP set point adjustment (mV)	from 200 to 900
Calibration ORP probe	1 point 470 mV
ORP probe	ORP Gold
Pump flow pH (l/h)	1,8
Corrective solution	pH- or pH+
Type of pH regulation	smart
pH set point adjustment	from 6,8 to 7,6
Calibration pH probe	2 points pH 7 & pH 10
pH probe	Blue
Cell installation	in line
Cell orientation	horizontal or vertical
Cell length (mm)	225
Maximum pressure in the cell (bar)	2
Maximum flow in the cell (m ³)	22 or By-pass
Maximum water temperature (°C)	40
Control panel size (mm)	W140 x H300 x D97

Installation diagram

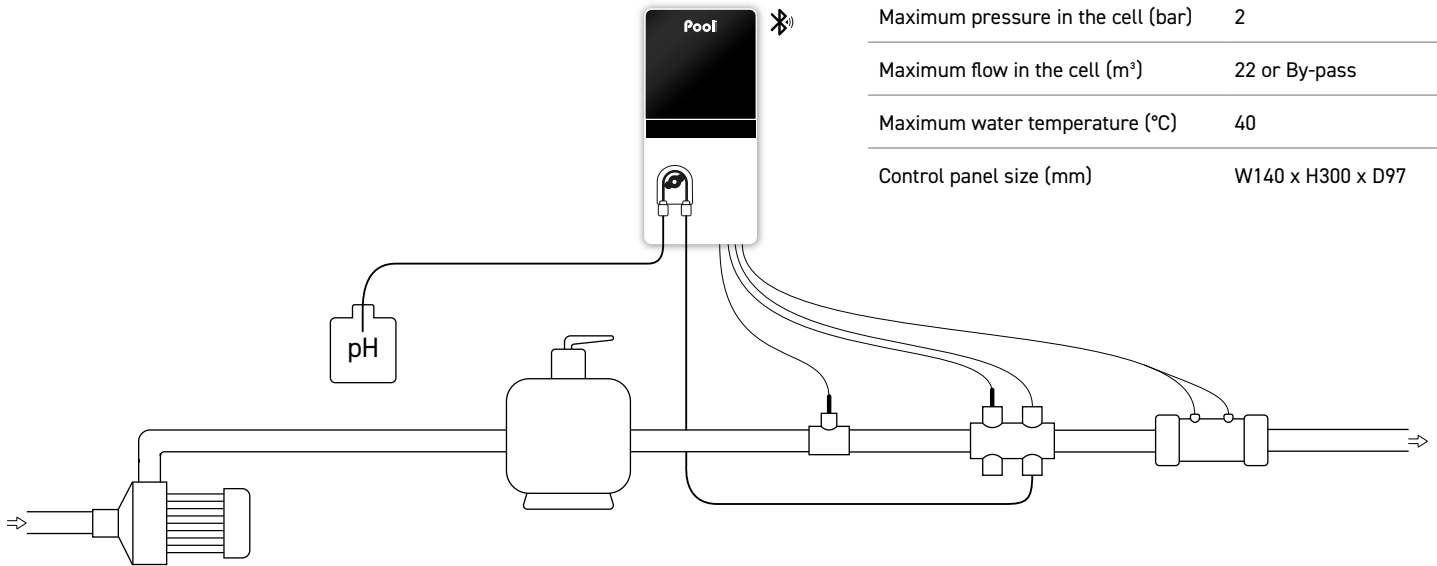

Content

- Control box
- Chlorination cell
- Cell cable (2m)
- pH probe Blue
- Calibration solutions pH 7 & pH 10
- ORP probe Gold
- ORP calibration solution 470mV
- Probe holder, injection connector
- Accessories holder with plugs
- Salt/temperature sensor
- Salt and water hardness analysis kit
- Paddle clamp (diam 50mm)
- Power cable (2m)
- Collar diam 63mm x2 (50mm <80m³ models)
- Reducer 63/50mm x4
- Wall support (with screws)
- User manual

Options

- Pool Terre grounding electrode
- Independent flow switch
- Empty can sensor
- e-Pool[®] Connect connected pool kit
see page 52-53

2 years WARRANTY
Box

2+2* years WARRANTY
Cell

2 years WARRANTY
Blue pH probe

1 year WARRANTY
ORP Gold probe

*See a retailer