

Justsalt[®] Pro

Pool
TECHNOLOGIE

Saltwater chlorinator + pH regulator
+ ORP controller



BENEFITS

- Intuitive navigation on backlit LCD display
- In line or dashboard display
- Soft touch keyboard with quick access keys
- Bluetooth remote control with e-Pool[®] app
- Low Salt / Normal Salt mode (depending on model)
- High quality pH and ORP probes, factory tested and calibrated
- Integrated silent dosing pump
- Compatible with new European regulation (N°2019/1148): pH correcting agent adjustable concentration
- Transparent accessories holder



FEATURES


- **Smart Power:** current monitoring ensuring stable production
- **Smart and proportional pH regulation** according to the pool volume in acid (pH-) or base (pH+) mode
- **Chlorine production control by ORP probe**
- **Self-cleaning cell with memory polarity inversion**, adjustable according to water hardness
- **Operate at any salt level from 2,5 g/l (NS) and 1,5 g/l (LS)** without high limit
- **Superboost mode:** 125% superchlorination for up to 24 hours to overcome an increased need of disinfectant
- **Low mode to reduce chlorine production**, when cover closed or bubbles cover installed
- **Automatic winterization and restart from 15C°**
- **Display of pool salt level, water temperature and cell lifespan**
- **Multilingual communication interface**
- **Multilingual alarm message:** written message display of malfunction cause
- **Safeties:** high and low ORP value, unreached setpoint, pH setpoint overrun and overfeeding
- **Log of events**
- **Self-diagnosis programme for easy maintenance**

Model	Pool volume* (m ³)	Chlorine production (g/h)	Reference
Justsalt Pro 8	40	8	ELPO24NPSA-G4NM08
Justsalt Pro 12	60	12	ELPO24NPSA-G4NM12
Justsalt Pro 16	NS 80 / LS 60	NS 16 / LS 12	ELPO24NPSA-G4HX16
Justsalt Pro 23	NS 120 / LS 80	NS 23 / LS 16	ELPO24NPSA-G4HX23
Justsalt Pro 30	NS 160 / LS 120	NS 30 / LS 23	ELPO24NPSA-G4HX30

* In hot climates, reduce the volume by 20% - NS : Normal Salt (5 g/l) / LS : Low Salt (1,5 g/l)

Technical specifications	
Display	LCD 2 lines
ORP setpoint adjustment (mV)	200 to 900
ORP probe calibration	1 point 475 mV
ORP probe	ORP Gold
pH pump flow (l/h)	1,8
Corrective solution	pH- or pH+
Type of pH regulation	smart
Setpoint adjustment	6,8 to 7,6
pH probe calibration	2 points pH 7 & pH 10
pH probe	Blue
Cell installation	in line
Cell orientation	horizontal or vertical
Cell length (mm)	225
Maximum pressure in the cell (bar)	2
Maximum flow in the cell (m ³)	22 or By-pass
Maximum water temperature (°C)	40
Control panel size (mm)	W 140 x H 300 x D 97

INSTALLATION DIAGRAM

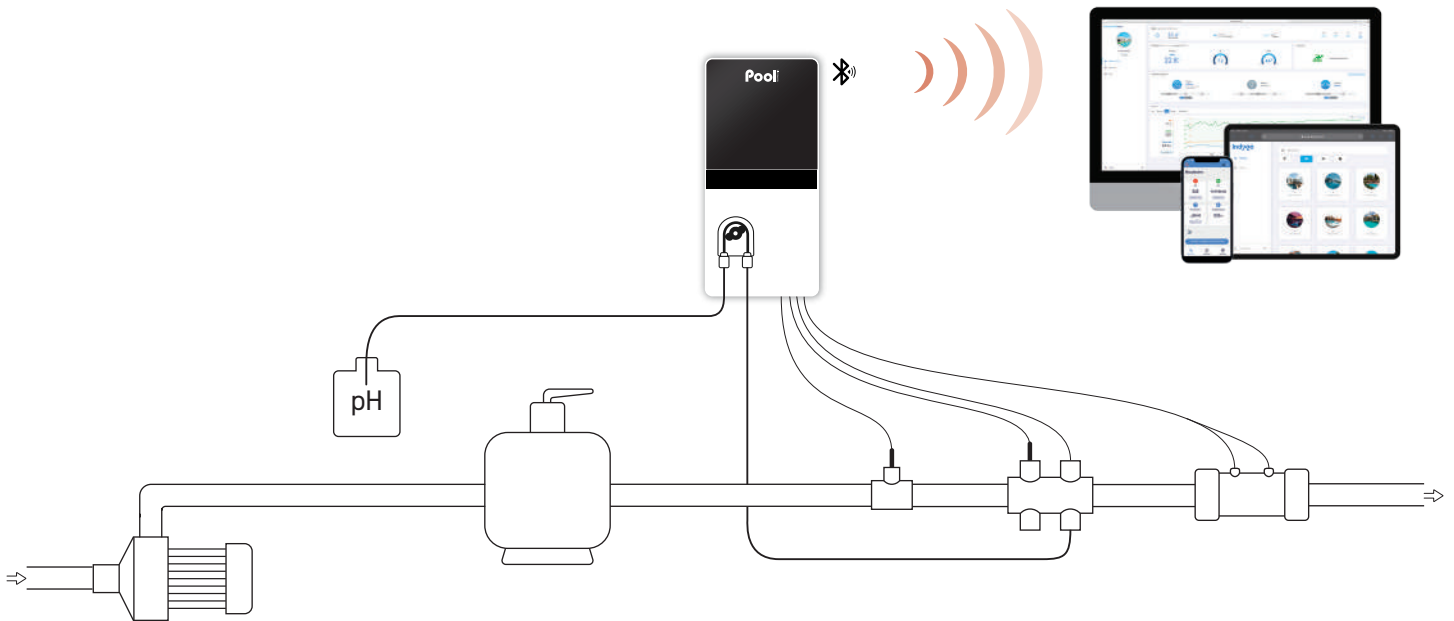

CONTENT

- Control box
- Chlorination cell
- Cell cable (2 m)
- pH Blue probe
- Calibration solutions pH 7 & pH 10
- ORP Gold probe
- ORP calibration solution 475 mV
- Probe holder, injection connector
- Accessories holder with plugs
- Salt/temperature sensor
- Salt and water hardness analysis kit
- Saddle clamp (Ø 50 mm)
- Power cable (2 m)
- Collar Ø 63 mm x2
- Reducer Ø 63/50 mm x4
- Wall support (with screws)

OPTIONS

- ORP measuring chamber and connection kit
- Grounding electrode
- Independent flow switch
- e-Pool® Connect Connected Pool kit
- Collar Ø 50 mm x2

WARRANTIES

- 2 years** Box
- 2+2^{*} years** Cell
* See a retailer
- 2 years** Probe pH Blue
- 1 year** Probe ORP Gold