


NEW

Pool TECHNOLOGIE

Minisalt[®] Connect

Saltwater chlorinator

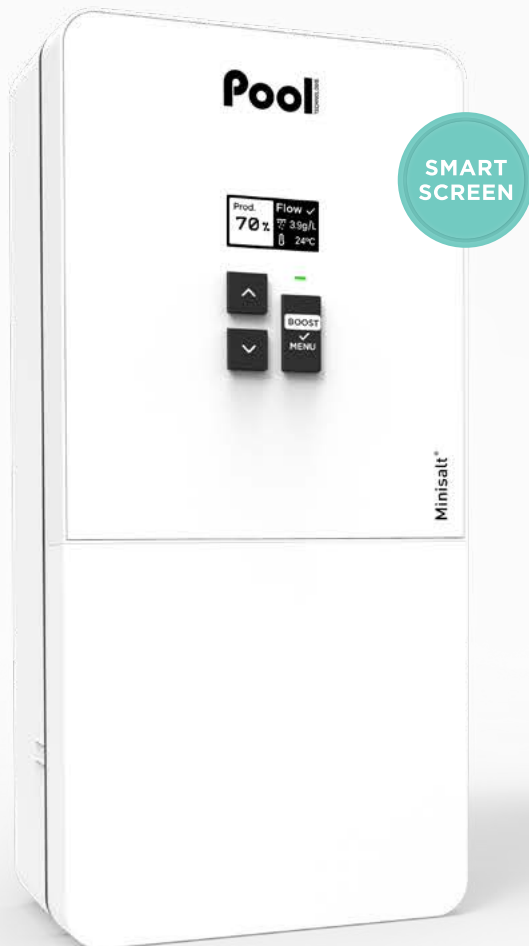

BENEFITS

- Intuitive navigation on Smart Screen OLED display
- Multilingual text menus
- Written alarm messages and operating status LED
- Integrated salt/temperature sensor
- Flow and cover inputs (flowswitch sensor optional)
- Bluetooth remote control with e-Pool[®] application
- Automatic wintering and restart



FEATURES

- Smart Power: current monitoring ensuring stable production
- Self-cleaning cell with memory polarity inversion, adjustable according to water hardness
- **Boost mode:** 125% superchlorination for up to 24 hours to overcome an increased need of disinfectant
- Low mode to reduce chlorine production with a closed cover
- Automatic wintering and restart from 15°C
- Safeties: lack of water, low salt, cell fault
- Event log for up to 90 days (via the e-Pool[®] application)
- Self-diagnosis programme for easy maintenance
- Operates for any salinity above 2.5 g/l (NS) and 1.5 g/l (LS) with no upper limit


Model	Pool volume* (m ³)	Chlorine production (g/h)	Reference
Minisalt Connect 8	40	8	ELCO25NPSB-G0NM08
Minisalt Connect 12	60	12	ELCO25NPSB-G0NM12
Minisalt Connect 16	NS 80 / LS 60	NS 16 / LS 12	ELCO25NPSB-G0HX16
Minisalt Connect 23	NS 120 / LS 80	NS 23 / LS 16	ELCO25NPSB-G0HX23
Minisalt Connect 30	NS 160 / LS 120	NS 30 / LS 23	ELCO25NPSB-G0HX30

*in hot climates reduce the volume by 20% - NS: Normal Salt (5 g/l) / LS: Low Salt (1.5 g/l)

Technical specifications

Display OLED	OLED
Polarity inversion setting	from 2h to 24h in 1h step
Boost setting	12h - 24h
Cell mounting	in-line
Cell orientation	horizontal or vertical
Cell dimensions (mm)	225
Maximum cell pressure (bar)	2
Maximum flow in the cell (m ³)	22 or By-pass
Maximum water temperature (°C)	40
Box dimensions (mm)	W 140 x H 300 x D 97

INSTALLATION DIAGRAM

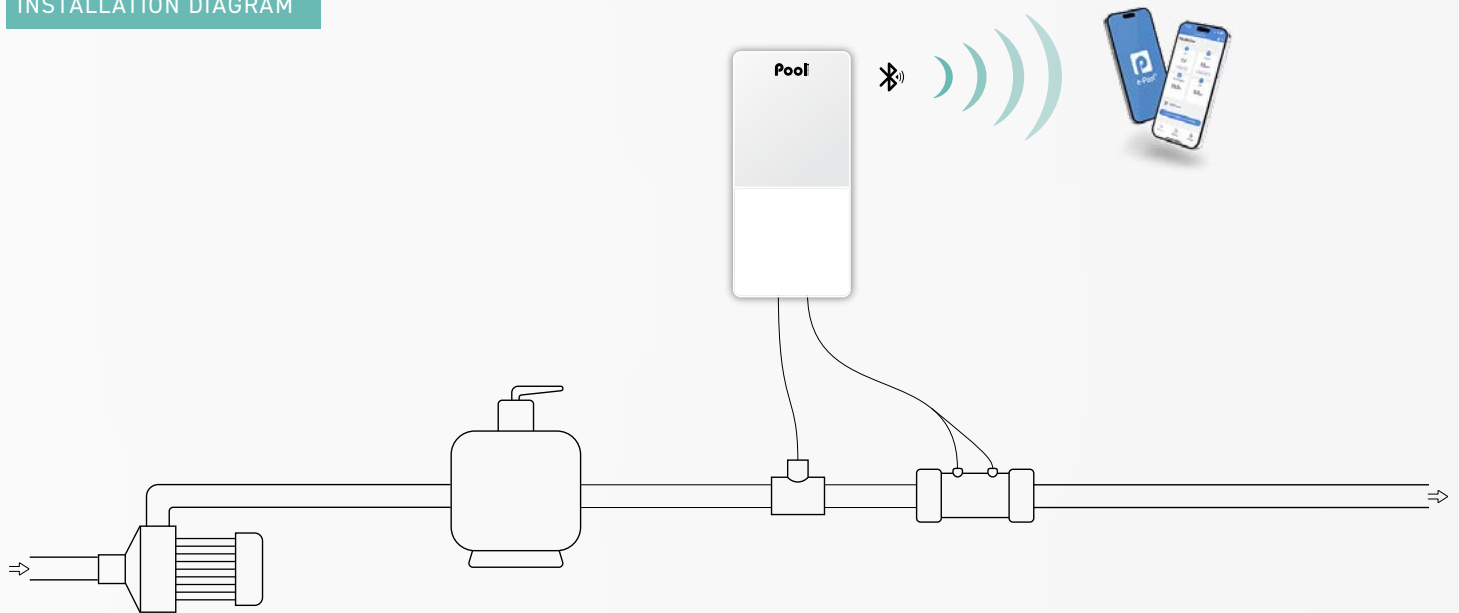

CONTENT

- Electronic box
- Chlorination cell
- Cell cable (2 m)
- Power cable (2 m)
- Salt/temperature sensor
- Saddle clamp Ø 50 mm
- Collar Ø 63 mm x2
- Reducer Ø 63/50 mm x4
- Wall mounting bracket (with screws)

OPTIONS

- Independent flow sensor
- Grounding kit
- Collar Ø 50 mm x2
- Indygo connected pool kit

WARRANTIES

2 years Box

2+2* years Cell

*see a retailer