

NEW

Pool  
TECHNOLOGIE

# Justsalt® UV

UV / Ultra Low Salt® Hybrid



## BENEFITS

- **Ultra Low Salt® technology:** operate at any salt level higher 0,5 g/l
- **New reactor design** consisting of a UV lamp and a ULS® electrode outlet to limit the destruction of chlorine by UV rays
- **Installation of the electrode at the reactor** outlet to limit the destruction of chlorine by UV rays
- **Integrated flow sensor**
- **Drain valve at the base of the reactor** for easy replacement of the UV lamp
- **Simplified maintenance of the electrode** without draining the reactor
- **Light well for visualising lamp operating status**
- **Compatible with 50 or 63 mm pipework** for easy installation
- **Soft and odorless swimming water**



## FEATURES

- **Smart Power:** current monitoring ensuring stable production
- **Ultra Low Salt® technology:** operate at any salt level higher 0,5 g/l
- **Ultra-violet sterilization**
- **Low mode to reduce chlorine production**, when cover closed or bubbles cover installed
- **Boost mode:** 100% superchlorination for up to 24 hours to overcome an increased need of disinfectant
- **Safeties:** low water, electrode or UV lamp failure


Model	Pool volume (m <sup>3</sup> )	Flow (m <sup>3</sup> /h)	Reference
Justsalt UV 15	50	15	ELLY24NPSA-G0VX15
Justsalt UV 25	100	25	ELLY24NPSA-G0VX25

## Technical specifications

Display	LED display
Polarity inversion adjustment	from 2h to 16h in increments of 2h
UV lamp power (watts)	60 or 90
UV wavelength	254 nm
UV lamp lifespan	16 000 hours*
Reactor height (mm)	787 (50m <sup>3</sup> ) / 1087 (100m <sup>3</sup> )
Reactor diameter (mm)	350
Control panel size (mm)	W 266 x H 360 x D 167

\*according to the number of ignitions

## INSTALLATION DIAGRAM

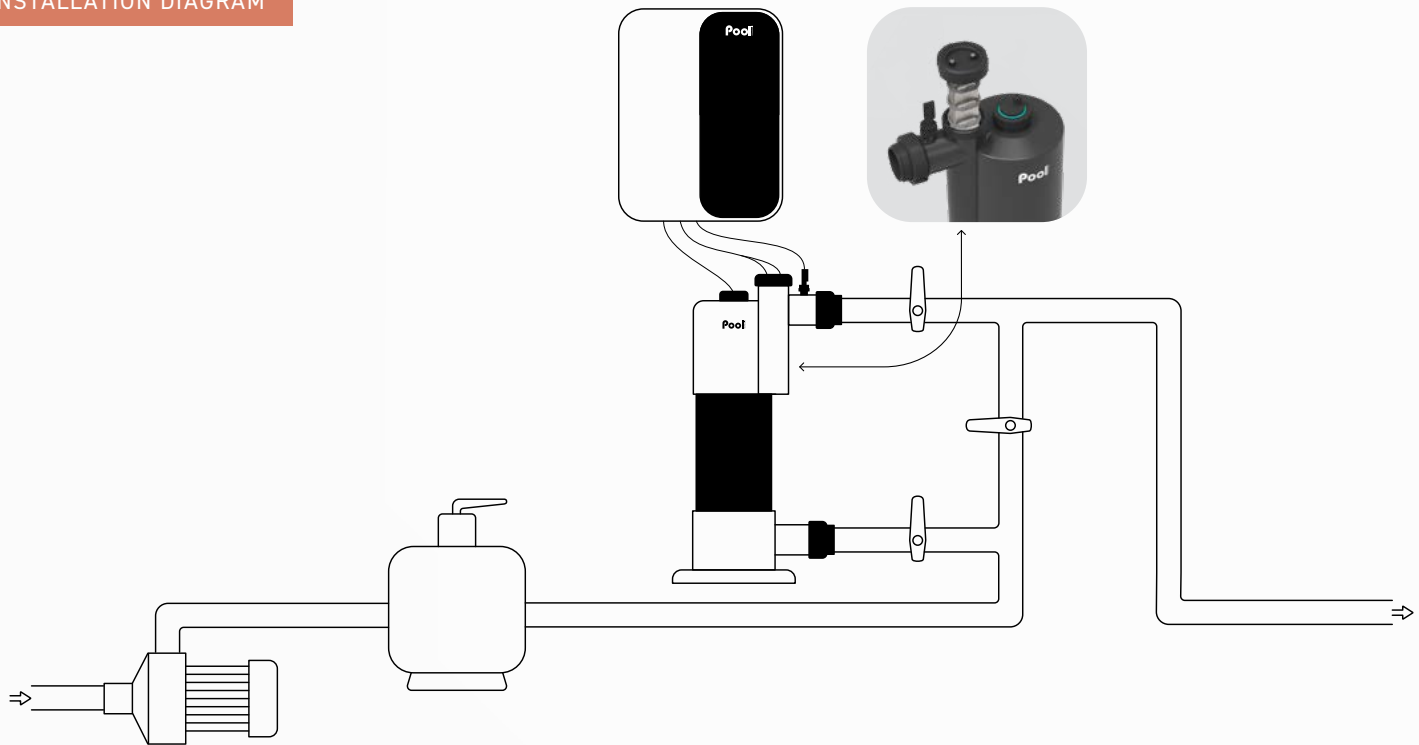

### CONTENT

- Control box
- UV reactor (electrode & lamp)
- Cell cable (2m)
- Flow sensor
- Wall support (with screws)
- Reducer Ø 63/50 mm x6

### OPTIONS

- Grounding kit
- 2 years warranty extension on electrode
- Salt/temperature sensor

### WARRANTIES

**2** years Box

**2** years Electrode ULS®