

NEW

Pool
TECHNOLOGIE

Just Dosing® Duo Aqua Control

Liquid chlorine dosage + pH regulator
+ ORP controller



BENEFITS

- **Enduro Pump:** Enduro Pump: long-life pump offering high resistance to acids whilst maintaining the flexibility of the Santoprene tube.
- **Geared motor with optimised rotation:** reduced friction and protection of parts thanks to a more regulated speed of 10 rpm
- **Roller holder made of resistant plastics** and composite axle: high chemical and mechanical resistance.
- Thick, long-life Santoprene tube (**7mm**), **centred on the rollers using the tube guide**
- **Sensor electronics protected** thanks to insulation against water-induced currents (Pool Terre recommended)
- **Bluetooth remote control** with the e-Pool® app
- pH and Redox values and water temperature **permanently displayed** on the backlit LCD screen
- **Easy fitting** with transparent 4-port accessory holder and wall bracket
- **Simple probe calibration:** 1 point (475 mV) for the Redox probe, 2 points (Ph7 & pH 10) for the pH probe
- Optional empty pH and chlorine container sensors.




FEATURES

- Automatic chlorine dosing via ORP probe
- **Smart pH regulation proportional to the pool volume** in acid (pH-) or base (pH+) mode
- Water temperature display
- **Multilingual alarm message:** cause of the malfunction shown by text message
- Adjustable ORP and pH setpoints
- **Safety devices:** high and low ORP values, setpoint not reached, pH setpoint and overdose ranges exceeded
- Easy installation and assembly

Model	Pool volume (m ³)	Pumps flow (l/h)	Reference
Just Dosing® Duo Aqua Control	120	1.5	DOOP26ACSA-G2

Technical specifications	
Screen	2-line LCD
ORP probe	Gold ORP
Disinfectant dosing	liquid chlorine
Intelligent injection	by ORP control
ORP setpoint adjustment (mV)	200 to 900
ORP probe calibration	1 point - 475 mV
pH probe	Blue
Corrective product	pH- or pH+
Type of pH regulation	smart
pH set point adjustment	6.8 to 7.6
pH probe calibration	2 points - pH 7 and pH 10
Control unit size (mm)	W 215 x H 301 x D 122

INSTALLATION DIAGRAM

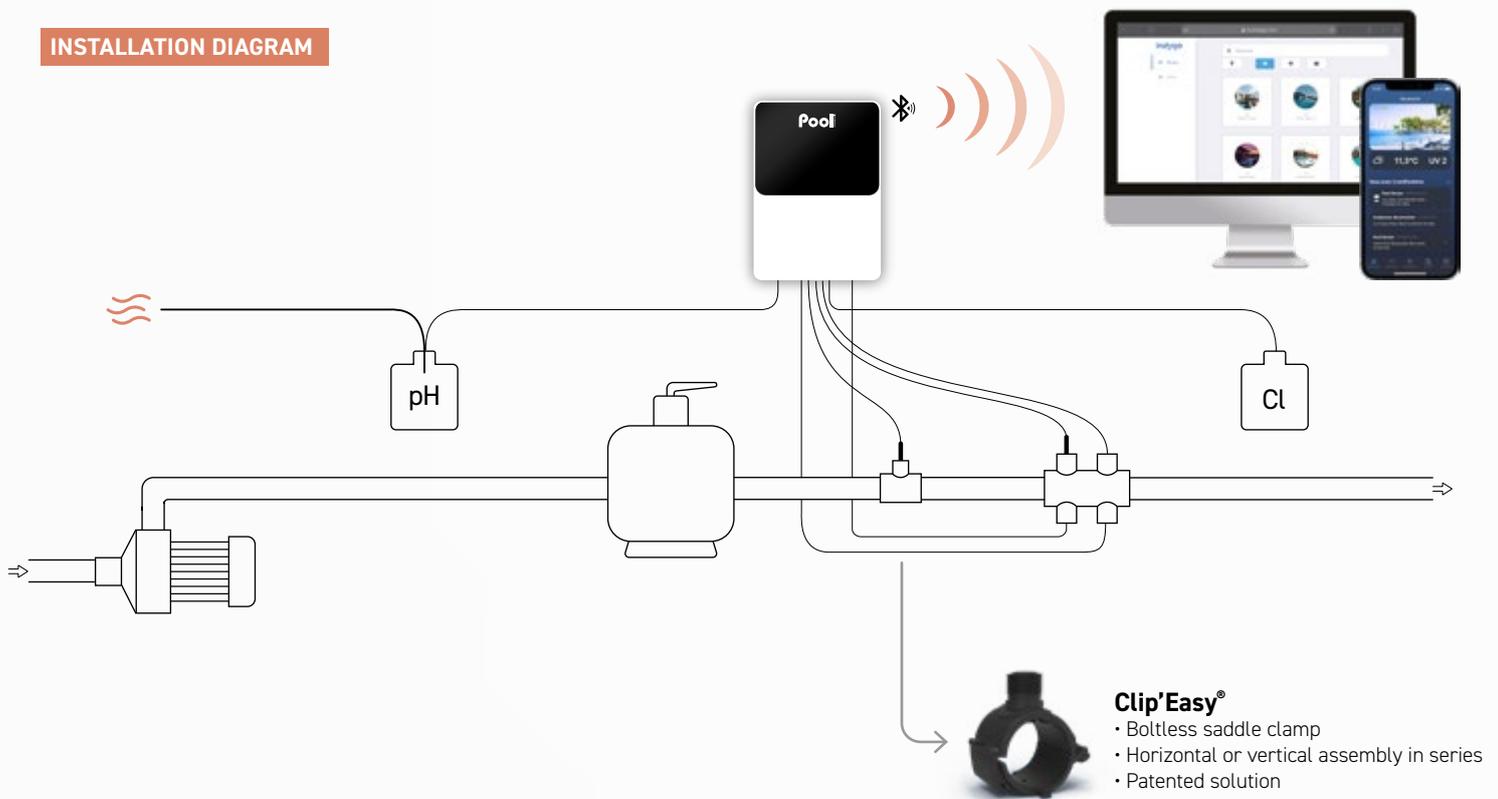

SUPPLIED WITH

- Control unit
- Gold ORP probe
- 475 mV ORP calibration solution
- Blue pH probe
- Calibration solutions pH 7 & pH 10
- Probe holder and injection connector
- Accessories holder with plugs
- Clip Easy (∅ 50 mm)
- Power cable (2 m)
- Temperature sensor
- ∅ 63/50 mm reducer x2
- Wall mounting bracket (with screws)

OPTIONS

- ORP measurement chamber + connection kit
- Indygo Connected Pool Kit

WARRANTIES

2 years Box

2 years Blue pH probe

1 year ORP Gold probe