

NEW

Pool  
TECHNOLOGIE

# Just Dosing® Aqua Control

Liquid chlorine dosage  
+ ORP controller



## BENEFITS

- **Enduro Pump:** long-life pump offering high resistance to acids whilst maintaining the flexibility of the Santoprene tube
- **Safedose technology:** regulation proportional to the injection cycles
- **Geared motor with optimised rotation:** reduced friction and protection of parts thanks to a more regulated speed of 20 rpm
- **3 l/hr pump** for large pools
- **Roller holder made of plastic materials** with high chemical and mechanical resistance
- **Thick, long-life Santoprene tube** (7mm), centred on the rollers using the tube guide
- **Probe electronics protected** thanks to insulation against water-induced currents (Pool Terre recommended)
- **New interface** with backlit 2-line LCD and 5-button keypad for smoother navigation
- **Easy single-point probe calibration** (475 mV)




## FEATURES

- **Safedose technology:** dosage adjusted by alternating on and off cycles, with a gradual reduction in injection time as the setpoint is approached.
- **Adjustable ORP setpoint**
- **ORP probe diagnostic:** displays the probe status after calibration
- **Menu language configuration** (7 choices)
- **Dynamic overdose monitoring** with alarms triggered if the volume of product injected exceeds the set threshold over a rolling 4-hour period.
- **Activation delay corresponding to the time required to polarise the probe**, so that it can equilibrate with the water parameters as soon as it is turned on.
- **Safety devices:** Cl overdose, high and low Redox value alarms

| Model                     | Pool volume (m <sup>3</sup> ) | Pump flow (l/h) | Reference     |
|---------------------------|-------------------------------|-----------------|---------------|
| Just Dosing® Aqua Control | 200                           | 3.0             | D00R26ACSA-A2 |

| Technical specifications        |                       |
|---------------------------------|-----------------------|
| Screen                          | 2-line LCD            |
| Disinfectant dosing             | liquid chlorine       |
| pH regulation type              | proportional          |
| Regulation technology           | by ORP probe          |
| ORP setpoint range              | 350 to 850 mV         |
| ORP probe calibration           | 1 point - 475 mV      |
| Injection cycle time adjustment | 3 to 300 secs         |
| Control unit size (mm)          | W 168 x H 238 x D 136 |

### INSTALLATION DIAGRAM

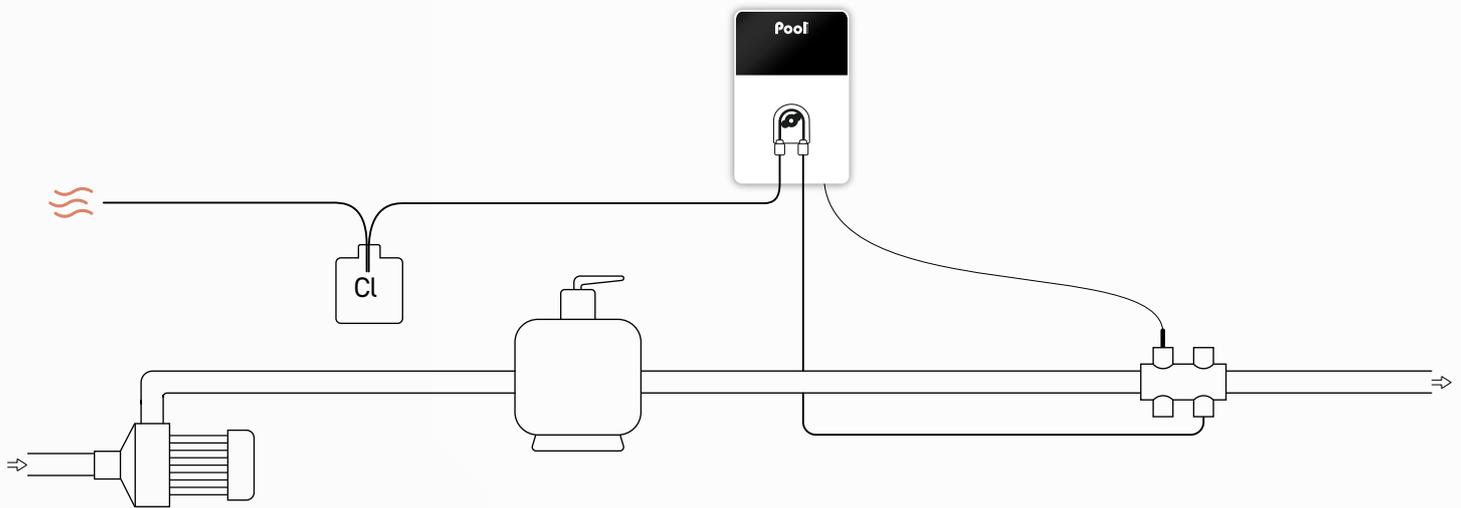

### SUPPLIED WITH

- Control unit
- Gold ORP probe
- 475 mV ORP calibration solution
- Probe holder and injection connector
- Accessories holder with plugs
- Clip Easy (∅ 50 mm)
- Power cable (2 m)
- Temperature sensor
- ∅ 63/50 mm reducer x2
- Wall mounting bracket (with screws)

### OPTIONS

- ORP measurement chamber + connection kit

### WARRANTIES

**3\*** Unit  
years

**1** ORP  
year Gold probe

\*Excluding consumables