


Dosipool® Pro

Automatic ORP dosage + pH regulator
+ ORP controller

Pool
TECHNOLOGIE

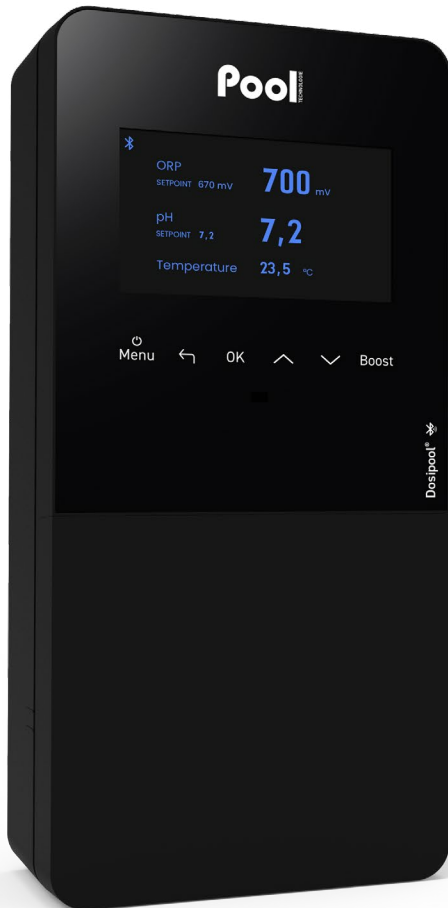

BENEFITS

- **Smart pH:** predictive regulation according to the history for a perfectly stable pH
- **IPS HD panel** for optimal display quality
- **Dynamic backlit capacitive keys** for easy navigation
- **Automatic brightness adjustment** via light sensor
- **Automatic standby output** by presence sensor
- **Intelligent user guidance** by written message
- **Colour-coded display of the pool status:** blue: optimal water quality, orange: information message, red: alarm
- **Indicators of the status of the device's functions** using pictograms (OFF, STOP, INJ...)
- **Simultaneous display** of setpoints ORP and pH value and water temperature
- **High quality pH Black and ORP Gold probes**, factory tested and calibrated
- **Bluetooth remote control** with e-Pool® app




FEATURES

- Automatic chlorine dosage by ORP probe
- Limits over/under chlorination issues and protects pool equipments (cover, liners, ect...)
- Intelligent, predictive and proportional pH control in acidic (pH-) or basic (pH+) mode according to injection history
- **Safeties:** high and low ORP values, unreached setpoints, pH setpoint overrun and overfeeding: cause of malfunction indicated by written message
- Adjustable ORP and pH setpoints
- Log of events
- Easy installation and assembly

Model	Pool volume (m ³)	Pumps flow (l/h)	Reference
Dosipool Pro	120	1,8	D00P23NPSP-G5
Dosipool Pro panel	120	1,8	D00P23NPSP-G5 PANORP

Technical specifications	
Display	IPS HD panel
Screen size	4,3 inches
Keyboard type	capacitive keyboard
Presence sensor range (cm)	20
ORP setpoint adjustment (mV)	200 to 900
ORP probe calibration	1 point 475 mV
ORP probe	ORP Gold
pH pump flow (l/h)	1,8
Corrective solution	pH- or pH+
pH pump type	peristaltic
Type of regulation	predictive
pH setpoint adjustment	6,8 to 7,6
pH probe calibration	2 points pH 7 and pH 10
Control box size (mm)	W 140 x H 300 x D 97

INSTALLATION DIAGRAM

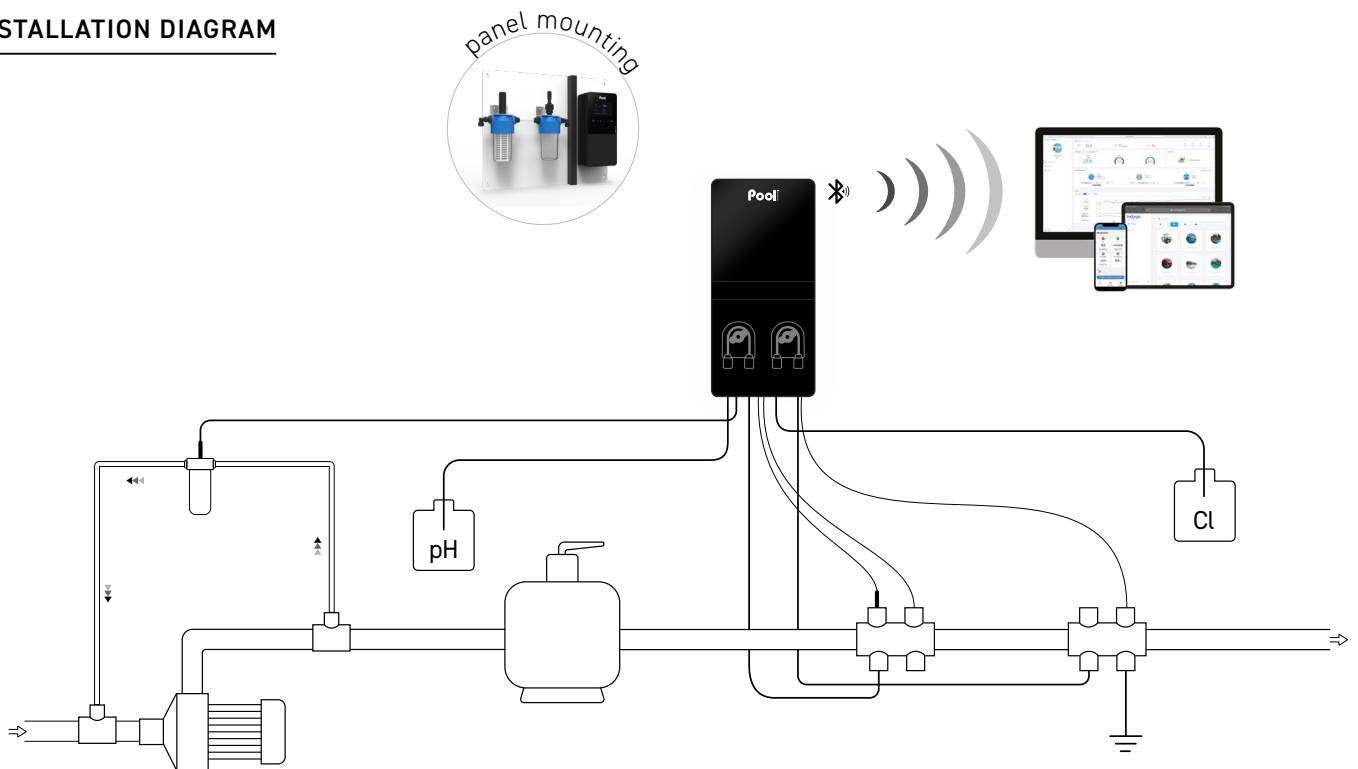

CONTENT

- Control box
- pH Black probe
- Calibration solutions pH 7 & pH 10
- ORP Gold probe
- ORP calibration solution 475 mV
- ORP probe Gold and ORP measure chamber kit
- Probe holder, injection connector
- Low water/temperature sensor
- Independent flow switch
- Accessories holder with plugs
- Grounding electrode
- Power cable (2 m)
- Saddle clamp x2 (Ø 50mm)
- Reducer Ø 63/50 mm x4
- Wall support (with screws)
- User manual

OPTIONS

- Empty pH can sensor
- Empty Cl can sensor
- e-Pool® Connect connected Pool Kit

WARRANTIES

- 2 years** Box
- 3 years** Probe pH Black
- 1 year** Probe ORP Gold