

NEW

Pool
TECHNOLOGIE

JustpH[®] Aqua Control

pH regulator



BENEFITS

- **Enduro Pump:** long-life pump offering high resistance to acids whilst maintaining the flexibility of the Santoprene tube.
- **Safedose technology:** regulation proportional to the injection cycle
- **Geared motor with optimised rotation:** reduced friction and protection of parts thanks to a more regulated speed of 10 rpm
- **Roller holder made of plastic materials** with high chemical and mechanical resistance
- **Long-lasting, thick (Ø 7 mm) Santoprene tube** centred on the rollers thanks to the tube guide.
- **New interface with backlit 2-line LCD** and 5-key keypad for smoother navigation
- **Sensor electronics protected** thanks to insulation against water-induced currents (Pool Terre recommended)
- **Simple installation and commissioning** thanks to the transparent 4-port accessory holder
- **Easy Lock:** clips into the wall bracket for greater stability




FEATURES

- **Safedose technology:** dosage adjusted by alternating on and off cycles, with a gradual reduction in injection time as the setpoint is approached.
- **pH correction** in acid (pH-) and base (pH+) modes
- **Adjustable pH set point**
- **Menu language configuration (7 choices)**
- **Injection cycle setting** from 3 to 300 secs
- **Dynamic overdose monitoring with alarms triggered** if the volume of product injected exceeds the set threshold over a rolling 4-hour period.
- **Activation delay corresponding to the time required to polarise the sensor**, so that it can equilibrate with the water parameters as soon as it is switched on.
- **pH calibration**
- **Safety:** overdose, high or low pH value
- **pH probe diagnostic:** displays the probe status after calibration

Model	Pool volume (m ³)	Pump flow (l/h)	Reference
JustpH® Aqua Control	160	1.5	REGU26ACSA-A2

Technical specifications	
Screen	digital display
Corrective solution	pH- or pH+
Type of pH regulation	proportional
pH set point adjustment	7 to 7.6
Injection cycle time adjustment	3 to 300 secs
pH probe calibration	2 points - pH 7 and pH 10
pH probe	Blue
Control unit size (mm)	W 140 x H 300 x D 97

INSTALLATION DIAGRAM

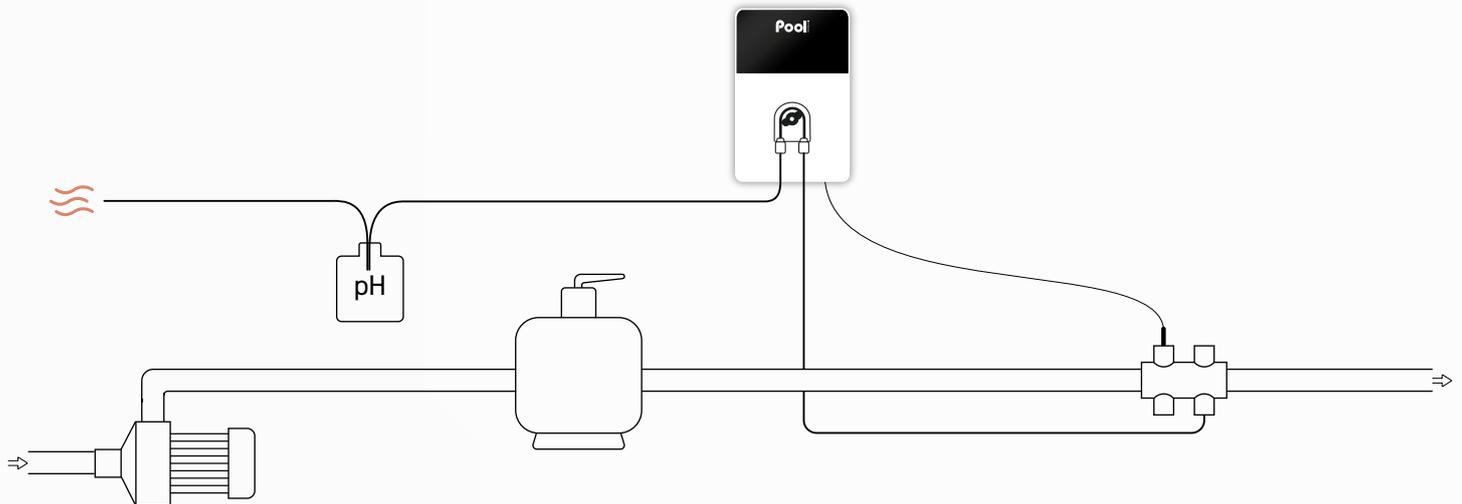

SUPPLIED WITH

- Control unit
- Blue pH probe
- Calibration solutions pH 7 & pH 10
- Probe holder and injection connector
- Accessories holder with plugs
- Power cable (2 m)
- Reducer \varnothing 63/50 mm x2
- Wall mounting bracket (with screws)

WARRANTIES

3* years Box

2 years Blue pH probe

* Excluding consumables