

Pro pH®

pH regulator



S

pH injection proportional to the difference
between the setpoints and the probe measurements

T

Panel mounted system
ready to install, easy to commission

I

F

Choice of pumps according to your needs
3 different technologies from 0.5 l/h to 115 l/h

E

Integrated flow sensor
to ensure safe operation

N

E

High-quality pH Blue probe
factory tested and calibrated

B

Intuitive navigation
on a wide-angle screen



Connectivity
e-Pool® app and connected pool
compatible

FEATURES

Proportional pH control in acid (pH-) or basic (pH+) mode

Settings: injection cycles, pH setpoint ranges, high/low thresholds

Log of events

Multilingual communication interface

Alarm messages: origin of the malfunction indicated by written message

Safeties: pH set point range exceeded and overrun

TECHNICAL SPECIFICATIONS

Screen: IPS HD panel

Correction product: pH- or pH+

Type of pH regulation: proportional

pH set point adjustment: 6.8 to 7.6

pH probe calibration: 2 points pH 7 and pH 10

pH probe: Blue

Box dimensions: W 140 x H 300 x D 97 mm

Panel dimensions: W 545 x H 450 x D 110 mm



1 pH Blue probe
MESU003003-PDC

2 Pre-filter with cartridge
washable polyester 50 µm

3 Integrated flow sensor
to guarantee pH value

PERISTALTIC PUMP

Flow (L/h)	Reference
0,5	OPT23PER05
6	OPT23PER6
12	OPT23PER12
20	OPT23PER20


ELECTROMAGNETIC PUMP

Flow (L/h)	Reference
5	OPT23MAG5
10	OPT23MAG10
22	OPT23MAG22

ELECTROMECHANICAL PUMP

Flow (L/h)	Reference
50	OPT23MAG50
115	OPT23MAG115

PRINCIPLE DIAGRAM

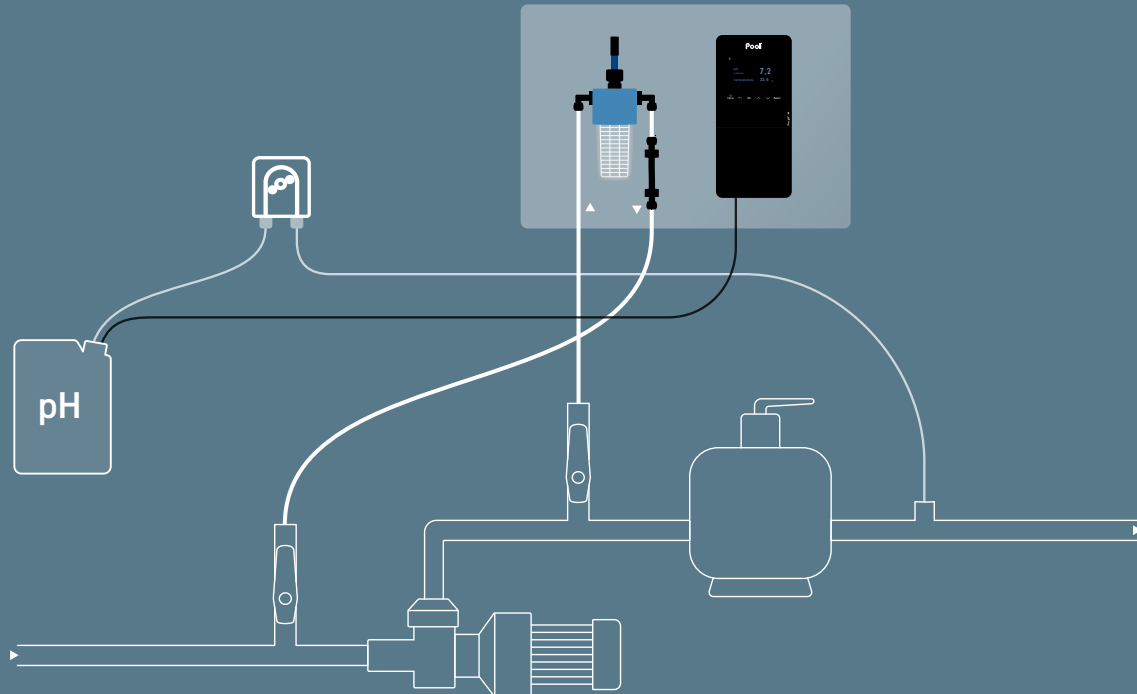

CONTENT

Panel-mounted electronic box and pH measuring chamber
pH Blue Probe
pH 7 & pH 10 calibration solutions
pH injection fitting
Measuring chamber flow sensor
Suction pipe with empty pH can sensor
Power cable (2 m)
User manual

WARRANTIES

Box: 2 years
pH Blue probe: 1 year

REFERENCE

REGU23POOC-G5