

# Mini UV

UV sterilizer



## BENEFITS

- **Up to 35% higher UV-C efficiency** due to stainless steel internal reflection
- **Duplex stainless steel reactor** perfectly adapted to salt water
- **High quality softglass UV lamp**, 9 000 hours
- **Compatible with Ø 63 mm and Ø 50 mm pipes** (including reducing pieces, 1<sup>1/2</sup> internal thread)
- **IP65 ballast**
- **2 models available** : 40W and 80W lamp
- **Compact, ideal for small technical rooms**
- **Compatible with our ULS Minisalt UV chlorinator** to ensure remanence



## FEATURES

- Water sterilisation by ultraviolet rays
- Easy installation directly on the hydraulic circuit of the pool
- Simplified maintenance


Model	Pool volume (m <sup>3</sup> )	Flow (m <sup>3</sup> /h)	Reference
Mini UV 40	50	11	STUV23NPSB-40
Mini UV 80	100	17	STUV23NPSB-80

## Technical specifications

Reactor material	316 L stainless steel
UV lamp lifespan	9 000 hours
UV lamp power (W)	40 or 80
Sealing ballast index	IP65
Reactor diameter (mm)	70
Reactor height (mm)	1000
Reactor weight (kg)	3,3

\*depending on the number of ignitions

## INSTALLATION DIAGRAM

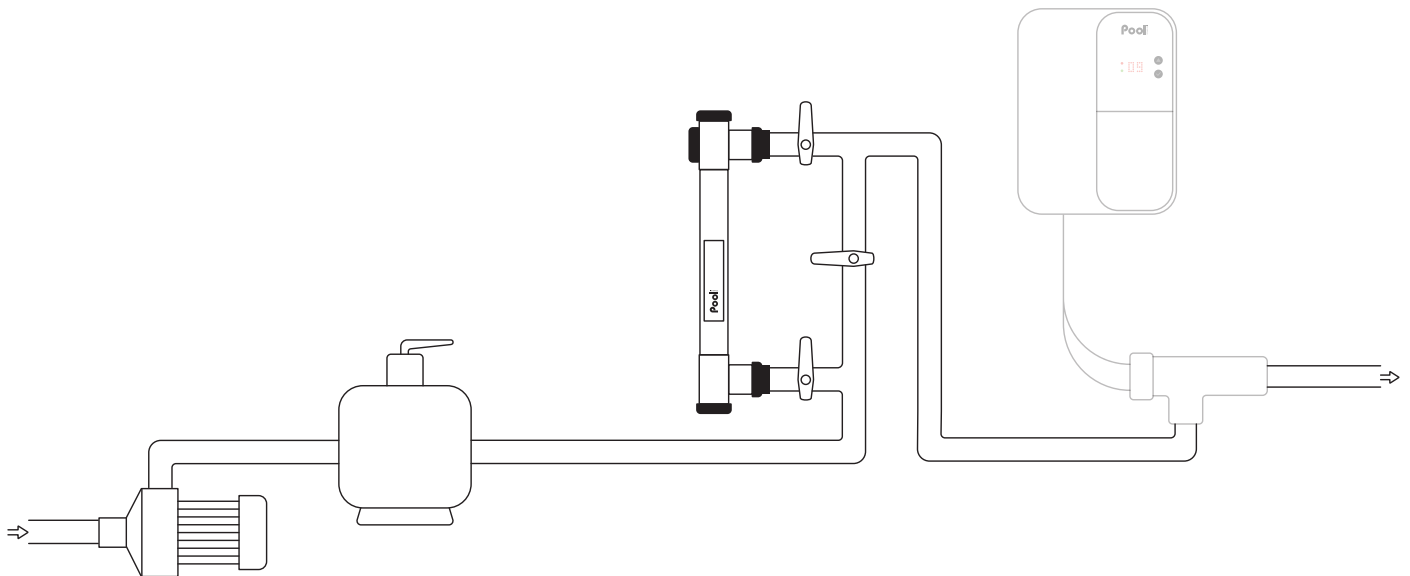

## CONTENT

- Stainless steel UV reactor
- UV lamp
- Grounding electrode
- Ballast
- Fixation collars (x2)
- Transparent connector  $\varnothing$  63 (x2)
- Transparent reduction  $\varnothing$  63/50 mm (x2)

## WARRANTY

**2** years Sterilizer