

NEW

Pool  
TECHNOLOGIE

# Mini Dosing<sup>®</sup> Aqua Control

ORP automatic liquid dosing



## BENEFITS

- **Enduro Pump:** long-life pump offering high resistance to acids whilst maintaining the flexibility of the Santoprene tube
- **Safedose technology:** regulation proportional to the injection cycles
- **Geared motor with optimised rotation:** reduced friction and protection of parts thanks to a more regulated speed of 10 rpm
- **Roller holder made of plastic materials** with high chemical and mechanical resistance
- **Thick, long-life Santoprene tube** (7mm), centred on the rollers using the tube guide
- **Translucent pump window** for quick pump checks
- **New intuitive interface:** mini LCD display to easily read the ORP value, and direct access keys
- **ORP value and warning messages permanently displayed**
- **Easy, single-point probe calibration** (475 mV)
- **Simple installation and commissioning** thanks to the Clip Easy screwless saddle clamp
- **Easy Lock:** clips into the wall bracket for greater stability




## FEATURES

- **Safedose technology:** dosage adjusted by alternating on and off cycles, with a gradual reduction in injection time as the setpoint is approached.
- Liquid chlorine dosing regulated by an ORP probe
- Adjustable ORP setpoint
- Safety device: high or low ORP value alarms
- ORP probe diagnostic: displays the probe status after calibration

Model	Pool volume (m <sup>3</sup> )	Pump flow (l/h)	Reference
Mini Dosing® Aqua Control	120	1.5	D00R26ACSB-A1

Technical specifications	
Screen	LCD
Disinfectant dosing	liquid chlorine
pH regulation type	proportional
Regulation technology	by ORP probe
ORP setpoint range	350 to 850 mV
ORP probe calibration	1 point - 475 mV
Control unit size (mm)	W 168 x H 238 x D 136

### INSTALLATION DIAGRAM

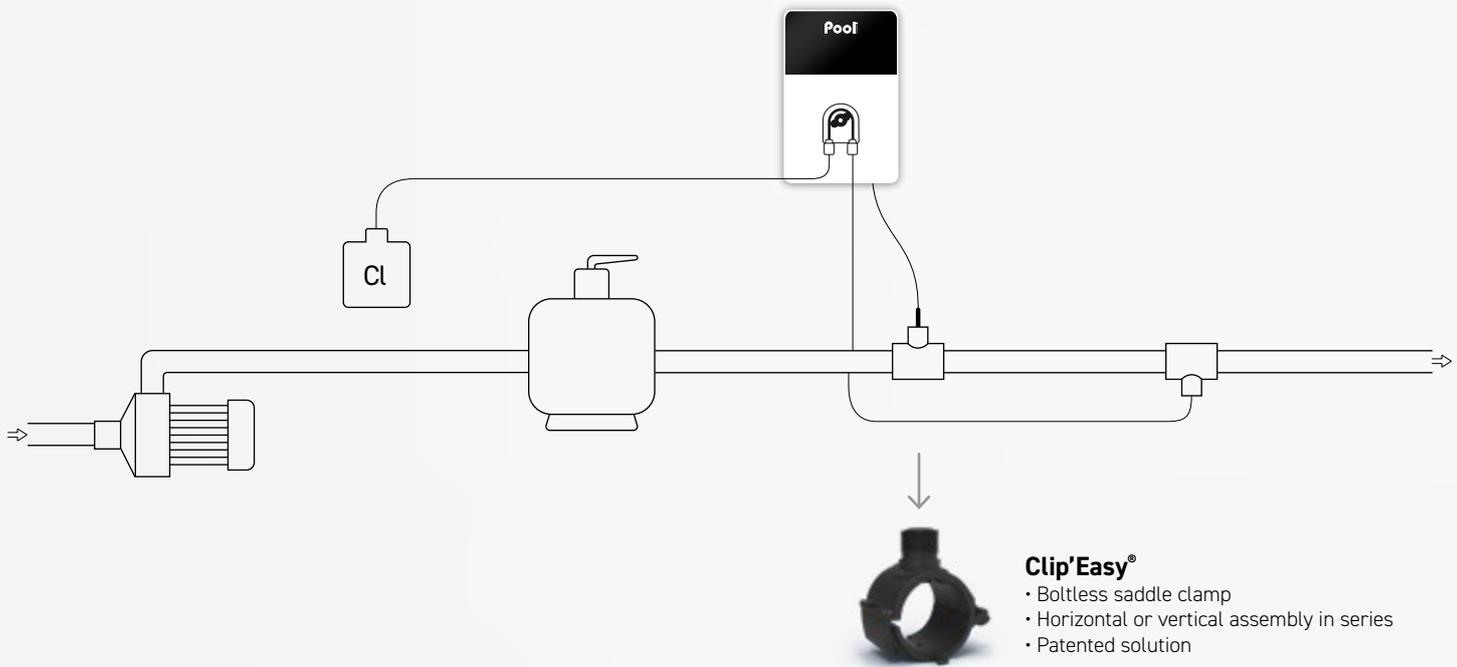

### SUPPLIED WITH

- Control unit
- Gold ORP probe
- 475 mV ORP calibration solution
- Probe holder and injection connector
- Clip'Easy® x2 (∅ 50mm)
- Power cable (2 m)
- Wall mounting bracket (with screws)

### OPTION

- ORP measurement chamber + connection kit

### WARRANTIES

**3\*** years Control unit

**1** year ORP Gold probe

\* Excluding consumables